

Rivetti MULTIGRIPRIV TS

MULTIGRIPRIV blind rivets

MGAFS

02520

■ Corpo in alluminio


Aluminium body









■ Chiodo in acciaio

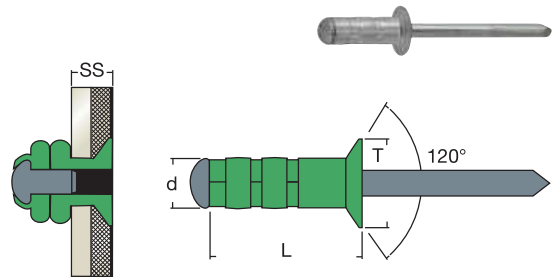
Steel mandrel

Testa svasata 120°

Countersunk head 120°



d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
3.2		8.0		5.8		0.5 ÷ 5.0	740	950	MGAFS32008	3596200	1000P	10000
			9.7			2.4 ÷ 6.4			MGAFS32009	0093700	1000P	10000
4.0		11.3		7.0		2.8 ÷ 7.9	1000	1500	MGAFS40011	0093800	1000P	6000
4.8		12.1		8.8		3.2 ÷ 7.9	1500	2000	MGAFS48012	0093900	500P	5000
			16.9			6.4 ÷ 12.7			MGAFS48016	0094000	500P	3000

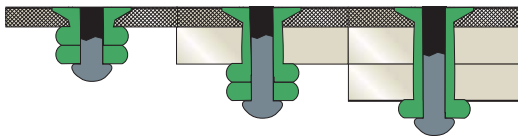

Applicazione:

La testa del chiodo comprime la boccia ottenendo così un serraggio a compressione e non a dilatazione, come avviene nei rivetti standard. L'ampio range dello spessore di serraggio di questi rivetti consente di rivettare con una sola lunghezza più spessori ed essere applicati su fori di ampia tolleranza. La testa del chiodo non salta mai via; è indicato per rivettare scatolati, parti soggette a vibrazioni, particolari materiali in alluminio, plastica, resina: non deforma questi tipi di materiali.

Application:

The head of the mandrel compresses the body of the blind rivet so that the fixing is obtained through compression and not expansion as it happens with standard blind rivets. The wide Jawing capacity of this blind rivet makes it possible to use the same length for riveting a wider range of thicknesses and to have a higher hole tolerance. The head of the mandrel never breaks. This blind rivet is recommended for riveting boxes, parts subject to vibrations, special parts in aluminium, plastic and resin as it doesn't warp these models of material.



Multiriv su metallo

Multiriv on sheet metal