

Rivetti MULTIGRIPRIV TT

MULTIGRIPRIV blind rivets

MGFFT

02750

■ **Corpo in acciaio**


Steel body









■ **Chiodo in acciaio**

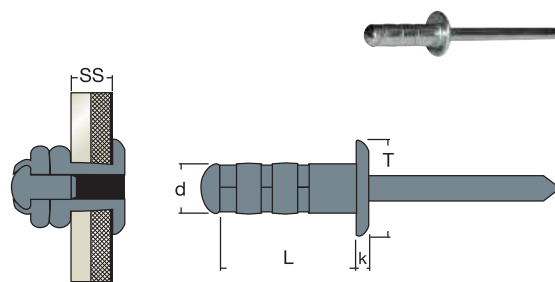
Steel mandrel

Testa tonda

Dome head



d		L	L ₁	T	k	SS			Tipo	Codice			
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz	
3.2		9.0		7.2	0.85	1.0 ÷ 4.0	800	1200	MGFFT32009	4379800	1000P	10000	
		13.0				1.0 ÷ 9.0			MGFFT32013	3247100	1000P	9000	
4.0		11.0		8.0	1.20	1.4 ÷ 5.0	1700	2300	MGFFT40011	4320600	1000P	6000	
4.8		11.0		9.8	1.45	1.0 ÷ 6.0	2500	3500	MGFFT48011	2892500	500P	5000	
		14.0				1.0 ÷ 9.0			MGFFT48014	2892600	500P	4000	
		17.0					4.0 ÷ 12.0			MGFFT48017	2892700	500P	3000
		21.0					7.0 ÷ 16.0			MGFFT48021	5033500	500P	3000

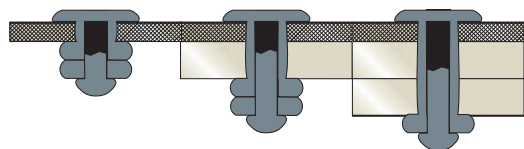

Applicazione:

La testa del chiodo comprime la boccia ottenendo così un serraggio a compressione e non a dilatazione, come avviene nei rivetti standard. L'ampio range dello spessore di serraggio di questi rivetti consente di rivettare con una sola lunghezza più spessori ed essere applicati su fori di ampia tolleranza. La testa del chiodo non salta mai via; è indicato per rivettare scatolati, parti soggette a vibrazioni, particolari materiali in alluminio, plastica, resina: non deforma questi tipi di materiali.

Application:

The head of the mandrel compresses the body of the blind rivet so that the fixing is obtained through compression and not expansion as it happens with standard blind rivets. The wide Jawing capacity of this blind rivet makes it possible to use the same length for riveting a wider range of thicknesses and to have a higher hole tolerance. The head of the mandrel never breaks. This blind rivet is recommended for riveting boxes, parts subject to vibrations, special parts in aluminium, plastic and resin as it doesn't warp these models of material.



Multigripriv su metallo

Multigripriv on sheet metal