

Rivetti MULTIGRIPRIV TT

MULTIGRIPRIV blind rivets

MGII/A2

02760

■ **Corpo in acciaio inox A2**


A2 stainless steel body








■ **Chiodo in acciaio inox A2**

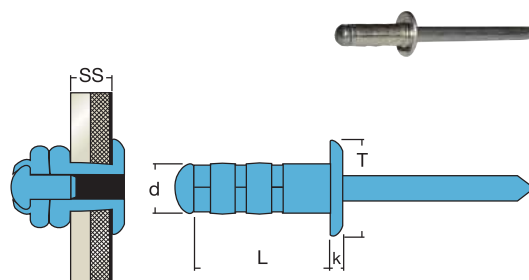
A2 stainless steel mandrel

Testa tonda

Dome head



d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
4.0		10.0		8.0	1.20	1.5 ÷ 5.0	2700	3000	MGIIA240010	2839200	500N	6000
		12.0				3.5 ÷ 7.0			MGIIA240012	2839300	500N	6000
		15.0				6.0 ÷ 9.5			MGIIA240015	2839500	500N	5000
4.8		10.0		9.8	1.75	1.5 ÷ 5.0	4000	4500	MGIIA248010	2696100	500N	5000
		12.0				3.0 ÷ 7.0			MGIIA248012	2696200	500P	5000
		15.0				6.5 ÷ 10.0			MGIIA248015	2839600	500P	4000
		17.5				9.5 ÷ 12.7			MGIIA248017	2839700	500P	3000

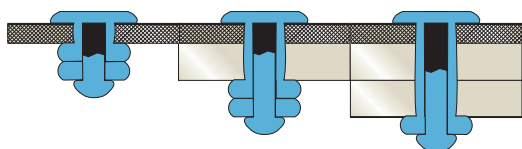


Applicazione:

La testa del chiodo comprime la boccia ottenendo così un serraggio a compressione e non a dilatazione, come avviene nei rivetti standard. L'ampio range dello spessore di serraggio di questi rivetti consente di rivettare con una sola lunghezza più spessori ed essere applicati su fori di ampia tolleranza. La testa del chiodo non salta mai via; è indicato per rivettare scatolati, parti soggette a vibrazioni, particolari materiali in alluminio, plastica, resina: non deforma questi tipi di materiali.

Application:

The head of the mandrel compresses the body of the blind rivet so that the fixing is obtained through compression and not expansion as it happens with standard blind rivets. The wide Jawing capacity of this blind rivet makes it possible to use the same length for riveting a wider range of thicknesses and to have a higher hole tolerance. The head of the mandrel never breaks. This blind rivet is recommended for riveting boxes, parts subject to vibrations, special parts in aluminium, plastic and resin as it doesn't warp these models of material.

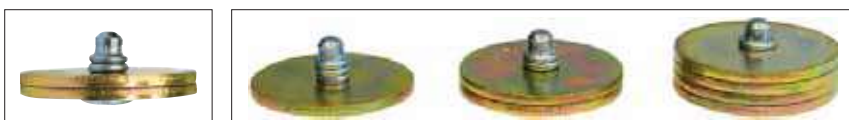

Multigripriv su metallo

Multigripriv on sheet metal