

Rivetti FIORIV-PANEL TT

FIORIV-PANEL blind rivets

FAFTPAN

02000

■ Corpo in alluminio



Aluminium body

■ Chiodo in acciaio

Steel mandrel

Testa tonda

Dome head

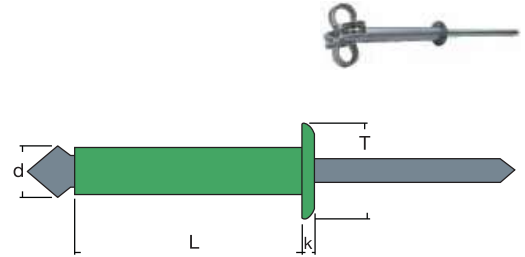

d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
6.4		76.0		12.5	2.0	40.0 ÷ 60.0	2450	3500	FAFTP64076	4215200	100G	500
		102.0				60.0 ÷ 80.0			FAFTP64102	4216400	100G	500
		127.0				91.0 ÷ 108.0			FAFTP64127	4296900	100G	500
		152.0				120.0 ÷ 130.0			FAFTP64152	4216600	100G	500
		178.0				140.0 ÷ 160.0			FAFTP64178	4216700	100G	250
		203.0				170.0 ÷ 180.0			FAFTP64203	4297100	100G	250
		228.0				190.0 ÷ 210.0			FAFTP64228	4297000	50G	250
		253.0				220.0 ÷ 235.0			FAFTP64253	4297200	-	200

Si consiglia di usare la punta Ø 6.50-6.75.

We advise to use the drill to make a hole of Ø 6.50-6.75.

Pannelli grecati per coperture coibentate

Zigzag panels for insulated covers



Per pannello 40 mm - Cod. **4216400**
For panel 40 mm - Item code **4216400**



Per pannello 80 mm - Cod. **4216600**
For panel 80 mm - Item code **4216600**




Per pannello 120 mm - Cod. **4216700**
For panel 120 mm - Item code **4216700**



Fiorivpanel su tavelloni in laterizio
Fiorivpanel applied on hollow flat blocks

Attrezzi consigliati

Suggested tools

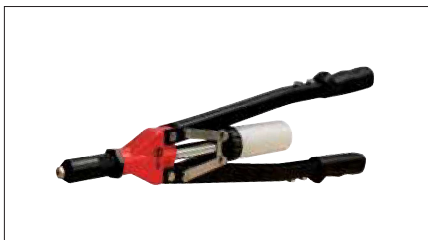

Rivettatrice manuale RIV7
Hand tool RIV7
Cod. **2338300**



Rivettatrice batteria RIV760
Battery tool RIV760
Cod. **1678700**