

Rivetti colorati MULTIGRIPRIV TT

MULTIGRIPRIV coloured blind rivets

MGAFTC

02500

■ Corpo in alluminio colorato (verniciato)


Coloured aluminium body (painted)

■ Chiodo in acciaio

Steel mandrel

Testa tonda

Dome head

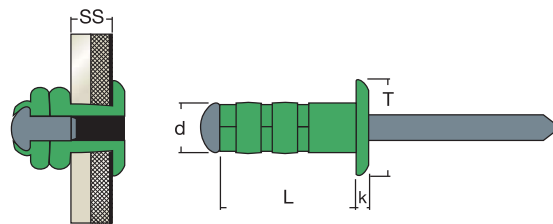

Nero (RAL 9005) | Black (RAL 9005)


d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
3.2	3.3	11.0		6.3	1.00	4.0 ÷ 7.9	740	950	MGAFT900532011	4573000	1000P	10000
4.0	4.1	12.7		8.0	1.35	4.0 ÷ 9.5	1000	1500	MGAFT900540012	1538600	1000P	6000
		16.9				6.4 ÷ 12.7			MGAFT900540016	1772100	500N	5000
4.8	5.0	10.3		9.5	1.50	1.6 ÷ 6.4	1500	2000	MGAFT900548010	1756400	500P	5000
		15.1				4.8 ÷ 11.1			MGAFT900548015	1756500	500P	4000
		16.9				6.4 ÷ 12.7			MGAFT900548016	4578200	500P	3000

Bianco (RAL 9010) | White (RAL 9010)

d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
4.0	4.1	12.7		8.0	1.35	4.0 ÷ 9.5	1000	1500	MGAFT901040012	0100500	1000P	6000
4.8	5.0	15.1		9.5	1.50	4.8 ÷ 11.1	1500	2000	MGAFT901048015	0100700	500P	4000

A richiesta i rivetti in alluminio sono disponibili in tutti i colori (riferimento scala RAL).

All colours available on request (referring to the RAL colour card).

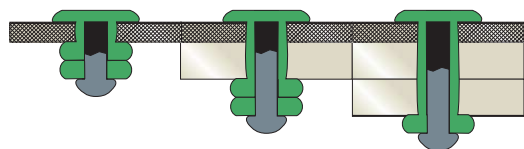

Applicazione:

La testa del chiodo comprime la boccia ottenendo così un serraggio a compressione e non a dilatazione, come avviene nei rivetti standard. L'ampio range dello spessore di serraggio di questi rivetti consente di rivettare con una sola lunghezza più spessori ed essere applicati su fori di ampia tolleranza. La testa del chiodo non salta mai via; è indicato per rivettare scatolati, parti soggette a vibrazioni, particolari materiali in alluminio, plastica, resina: non deforma questi tipi di materiali.

Application:

The head of the mandrel compresses the body of the blind rivet so that the fixing is obtained through compression and not expansion as it happens with standard blind rivets. The wide jawing capacity of this blind rivet makes it possible to use the same length for riveting a wider range of thicknesses and to have a higher hole tolerance. The head of the mandrel never breaks. This blind rivet is recommended for riveting boxes, parts subject to vibrations, special parts in aluminium, plastic and resin as it doesn't warp these models of material.



Multiriv su metallo

Multiriv on sheet metal