

Rivetti stagni MULTIGRIPRIV A2 TT

MULTIGRIPRIV Saled A2 stainless steel blind rivets

SMGIIT/A2

01910

■ **Corpo in acciaio inox A2**


A2 stainless steel body

■ **Chiodo in acciaio inox Aisi 420**


Aisi 420 stainless steel mandrel

Testa tonda

Dome head

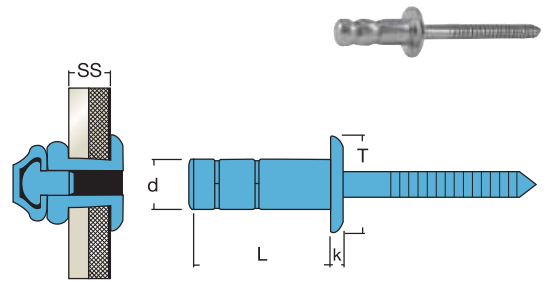

d		L	L ₁	T	k	SS			Tipo	Codice		
mm	mm	mm	mm	mm	max	mm	N	N	Model	Item code	pz	pz
4.8		12.0		9.5	1.25	0.5 ÷ 4.5	4400	4900	SMGIITA248020	5080100	500P	5000
		13.7				3.5 ÷ 6.0			SMGIITA248013	5080200	500P	5000
		15.3				5.0 ÷ 7.5			SMGIITA248015	5080300	500P	4000
		16.8				6.5 ÷ 9.0			SMGIITA248016	5080400	500P	4000
		19.7				9.0 ÷ 11.5			SMGIITA248019	5080500	500P	3000

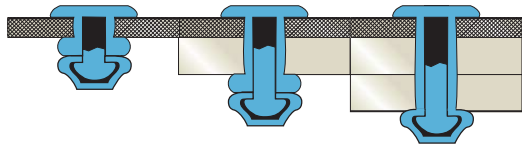

Applicazione:

La testa del chiodo comprime la boccia ottenendo così un serraggio a compressione e non a dilatazione, come avviene nei rivetti standard. L'ampio range dello spessore di serraggio di questi rivetti consente di rivettare con una sola lunghezza più spessori ed essere applicati su fori di ampia tolleranza. La testa del chiodo non salta mai via; è indicato per rivettare scatolati, parti soggette a vibrazioni, particolari materiali in alluminio, plastica, resina: non deforma questi tipi di materiali.

Application:

The head of the mandrel compresses the body of the blind rivet so that the fixing is obtained through compression and not expansion as it happens with standard blind rivets. The wide Jawing capacity of this blind rivet makes it possible to use the same length for riveting a wider range of thicknesses and to have a higher hole tolerance. The head of the mandrel never breaks. This blind rivet is recommended for riveting boxes, parts subject to vibrations, special parts in aluminium, plastic and resin as it doesn't warp these models of material.



Multigrpriv su metallo

Multigrpriv on sheet metal